


Surface Mount Transient Voltage Suppressor Diode Array

Features

- ✧ ESD protection of four I/O lines
- ✧ Solid-state silicon-avalanche technology
- ✧ Working Voltage: 5.0V
- ✧ Peak Power up to 90 Watts @ 8 x 20μs Pulse
- ✧ Low Leakage current
- ✧ Response Time is Typically < 1 ns
- ✧ IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- ✧ IEC 61000-4-4 (EFT) 40A (5/50ns)

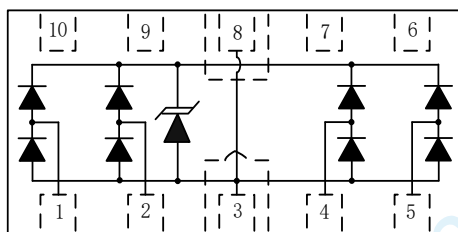


Circuit Diagram

Applications

- ✧ Cellular Handsets & Accessories
- ✧ Portable devices
- ✧ HDMI1.3/1.4/2.0

Mechanical Data

- ✧ UL Flame Rating : UL94V-0
- ✧ Reel Size : 7 inch
- ✧ RoHS/WEEE Compliant

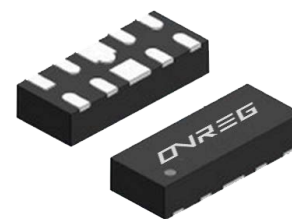

DFN2510-10

Absolute Maximum Rating at $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	90	Watts
Peak Pulse Current ($t_p = 8/20\mu\text{s}$) (note1)	I_{pp}	6	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	±30 ±30	kV
Lead Soldering Temperature	T_L	260(10seconds)	$^{\circ}\text{C}$
Junction Temperature	T_J	-55 to + 125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 to + 150	$^{\circ}\text{C}$


Electrical Characteristics at $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typical	Max.	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	6.0			V
Reverse Leakage Current	I_R	$V_{RWM}=5.0\text{V}$, $T=25^{\circ}\text{C}$			1.0	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			6.0	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}$, $t_p=8/20\mu\text{s}$		7.6		V
Clamping Voltage	V_C	$I_{PP}=6\text{A}$, $t_p=8/20\mu\text{s}$		13	15.0	V
ESD Clamping Voltage	V_C	$t_p=0.2/100\text{ns}$, $I_{TLP}=4\text{A}$		10.0		V
ESD Clamping Voltage	V_C	$t_p=0.2/100\text{ns}$, $I_{TLP}=16\text{A}$		17.0		V
Dynamic Resistance	R_{DYN}	$t_p=0.2/100\text{ns}$		0.58		Ω
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$	I/O to I/O	0.30	0.40	pF
			I/O to GND	0.50	0.65	





Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. All parameters specified at $T_A = 25^{\circ}\text{C}$ unless otherwise noted.
2. These parameters are guaranteed by design and characterization.
3. Standard IEC 61000-4-2 with $C_{Discharge} = 150\text{ pF}$, $R_{Discharge} = 330\text{ }\Omega$


Electrical Parameters at $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

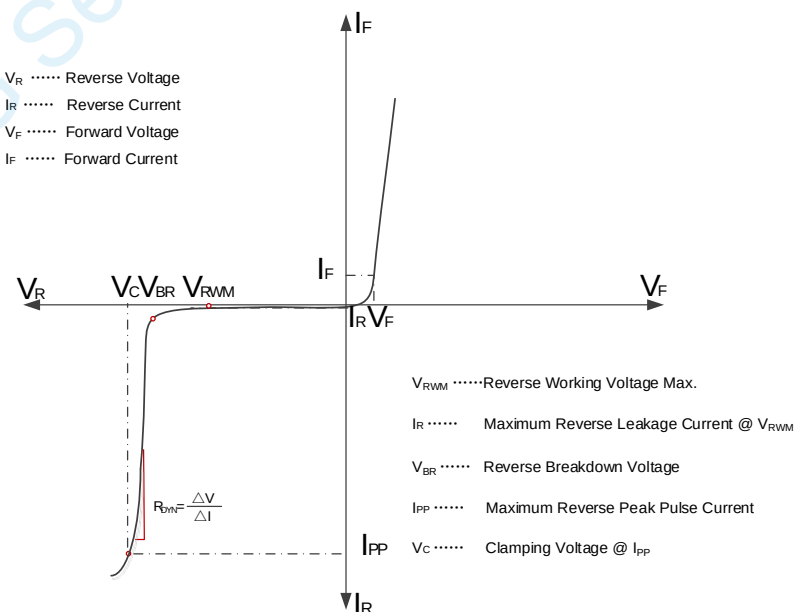

Typical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

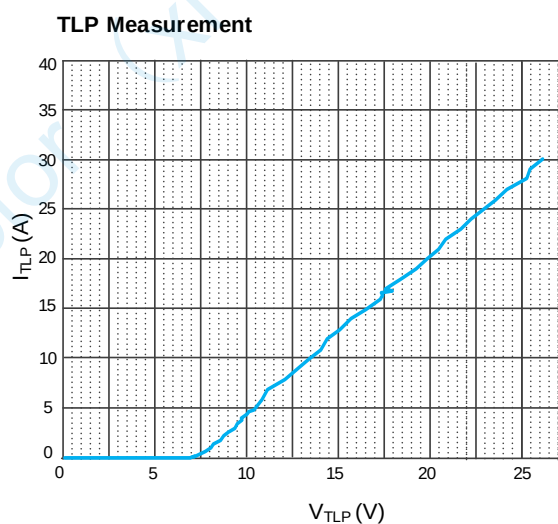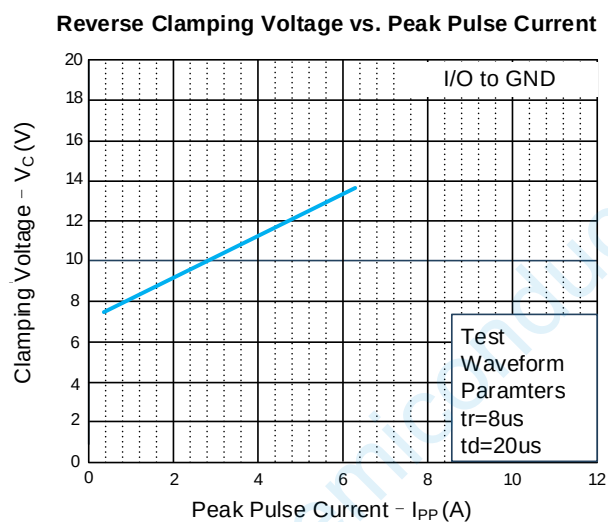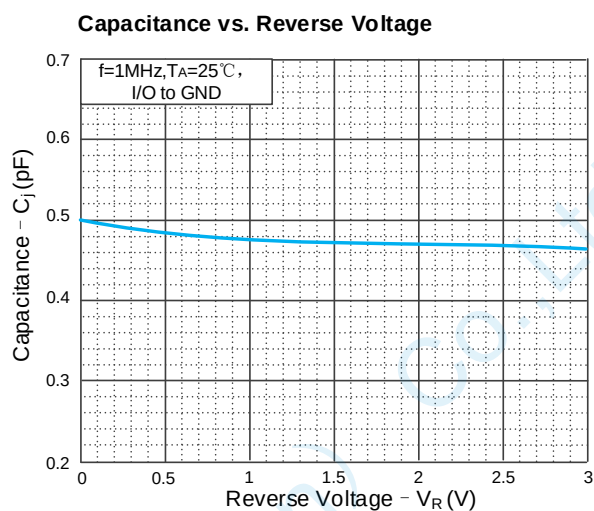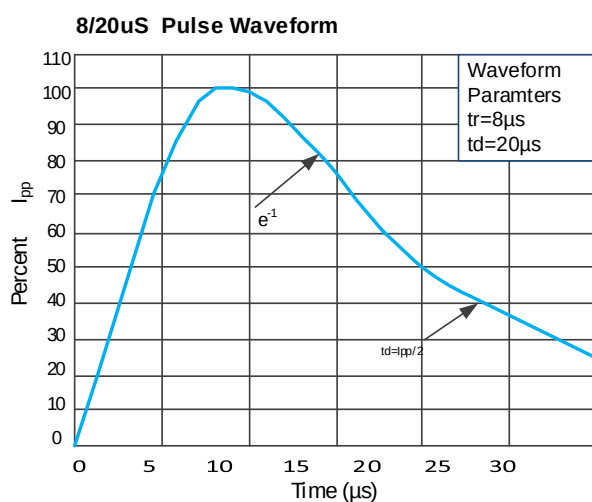


Package Information

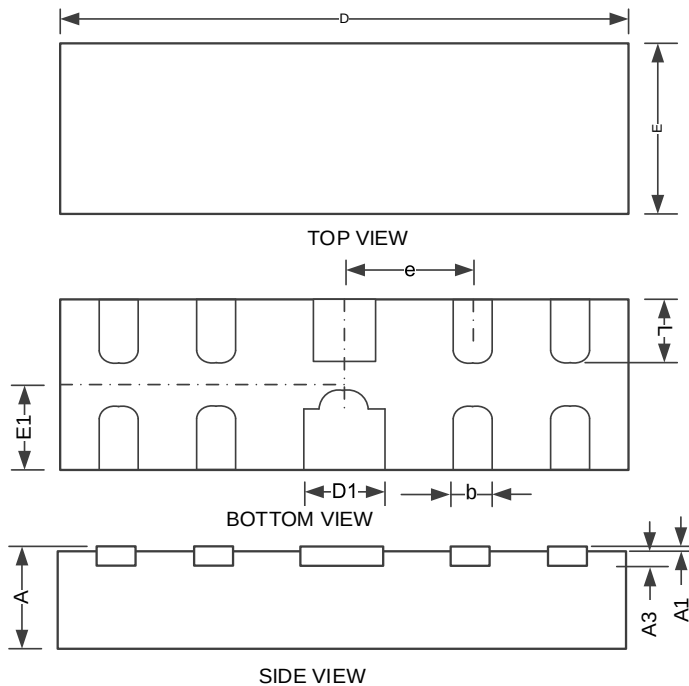

COMMON DIMENSION (MM)			
PKG	DFN2510-10L		
REF.	MIN.	NOM.	MAX.
A	0.430	-	0.600
A1	0.000	-	0.050
A3	0.150REF.		
D	2.450	2.500	2.550
E	0.950	1.000	1.050
D1	0.350	0.400	0.450
E1	0.450	0.510	0.560
b	0.150	0.200	0.250
L	0.330	0.380	0.430
e	0.500		

Recommend PCB Layout

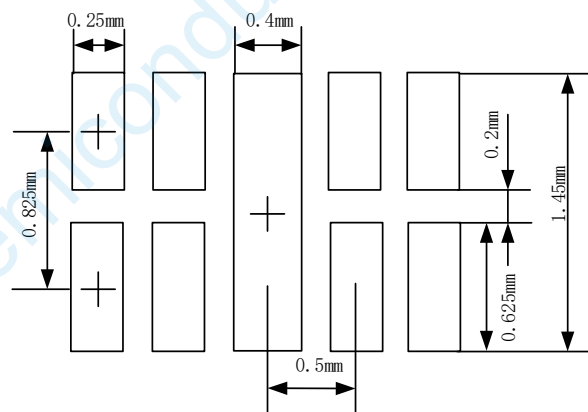

Notes: This Pcb Layout Is For Reference Purposes Only

Marking

M524

Ordering Information

Part number	Material	Type	Reel size	MOQ	MOQ/internal box	MOQ/carton
OV608A1	GREEN	T/R	7 inch	3k/reel	10reel= 30k/box	4boxes=120k/carton